

Hypertherm®

MAXPRO200®

LongLife® air and oxygen plasma cutting system



Maximized productivity, easy operation, reliable performance

MAXPRO200




The MAXPRO200 plasma cutting system achieves impressive cut speeds, consistent cut quality and exceptional consumable life with air or oxygen plasma gas. Optimized cutting parameters are automatically set and controlled in one step for easy operation. Engineered for heavy-duty, high capacity mechanized and handheld cutting and gouging, the MAXPRO200 delivers reliable performance across a wide range of industrial applications.

Maximized productivity

MAXPRO200 combines fast cutting speeds and quick process changes to maximize productivity.

- The fastest cut speeds in its class produce more finished parts per hour.
- Engineered with 100% duty cycle for the most demanding production environments.
- Quickly transition between cutting, gouging, mechanized and handheld processes with automatic settings, tool free leads and quick disconnect torches.

Fast cutting speeds = maximum productivity

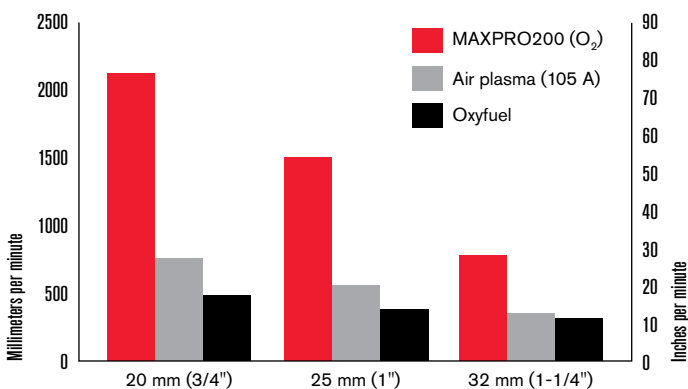

Easy operation

The easiest plasma system in its class for air and oxygen plasma cutting – easy to install, easy to operate, easy to maximize performance.

- Intuitive one step interface and automatic gas control deliver consistent results without operator intervention.



- Advanced diagnostics simplify troubleshooting and service.
- Optional serial communications allow full control of the system from the CNC.


Step up to a superior technology

MAXPRO200 vs. oxyfuel

Cut speeds and pierce times are as much as 7 times faster for maximized productivity.

- Significantly lowers operating cost per part up to 50 mm (2").
- Less dross, less warping, and a smaller heat-affected zone to minimize high-cost secondary operations.
- Increases flexibility to cut and gouge mild steel, stainless steel, aluminum, and stacked, painted or rusted metal.
- Improves mild steel cutting safety over the use of acetylene, a highly flammable gas used for oxyfuel cutting.

Ten times lower cost per meter (foot)

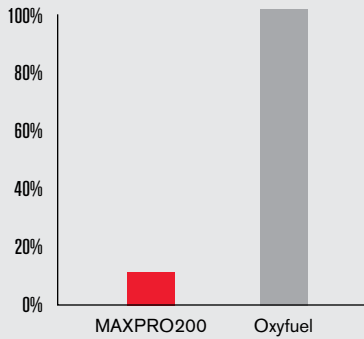

Low operating cost

Exceptional consumable life and consistent performance deliver more cost-effective results.


- Do more with less power: patented consumable designs enable best in class cut speeds and robust production piercing using lower amperage levels.
- Superior cut quality and consistency minimize high cost secondary operations.
- Advanced consumable technologies including LongLife®, CoolFlow™ and TrueFlow™ significantly increase consumable life to reduce cost per part.



Longer consumable life = more cost effective

12 mm (1/2") mild steel

200 A Air/Air

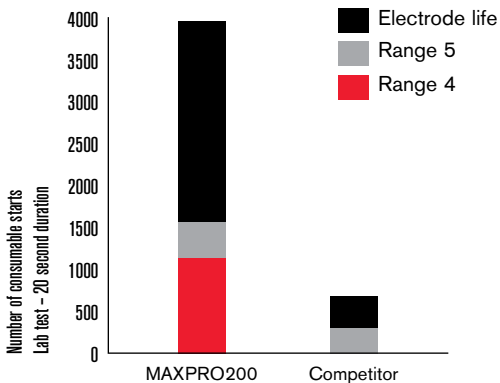

Reliable performance

Engineered and tested using the same proven design process as the HyPerformance® HPRXD® product family for superior reliability in the most demanding cutting environments.

- During development, Hypertherm systems endure rigorous reliability testing procedures equivalent to years of use in extreme operating environments.
- The MAXPRO200 is built with less than half the number of internal parts compared to other systems on the market. Fewer parts provide greater reliability and serviceability.
- Self-diagnostics are performed automatically at startup and continually throughout the cutting process.

MAXPRO200 65° handheld torch

MAXPRO200 90° handheld torch

MAXPRO200 straight machine torch

MAXPRO200 quick-disconnect machine torch



Specifications

| | |
|------------------------|--|
| Input voltages | 200/208 VAC, 3-PH, 50 Hz, 108/104 A 220 VAC, 3-PH, 50-60 Hz, 98 A 240 VAC, 3-PH, 60 Hz, 90 A 380 VAC, 3-PH, 50 Hz, 57 A 400 VAC, CE, 3-PH, 50-60 Hz, 54 A 415 VAC, CE, 3-PH, 50 Hz, 52 A 440 VAC, 3-PH, 50-60 Hz, 49 A 480 VAC, 3-PH, 60 Hz, 45 A 600 VAC, 3-PH, 60 Hz, 36 A |
| Output voltage | 50-165 VDC |
| Maximum output current | 200 A |
| Duty cycle rating | 100% @ 33 kW, at 40° C (104° F) |
| Operating temperature | -10° C to 40° C (+14° F to +104° F) |
| Power factor | 0.98 @ 33 kW output |
| Maximum OCV | 360 VDC |
| Dimensions | 102 cm (40.14") H, 69 cm (27.12") W, 105 cm (41.23") L |
| Weight | 335 kg (740 lbs) |
| Gas supply | Air, O ₂ , N ₂ |
| Plasma gas | Air, N ₂ |
| Shield gas | Air, N ₂ |
| Supply gas pressure | 6.2 +/- 0.7 bar (90 +/- 10 psig) |



Handheld torch and gouging

- 200 A handheld torch capable of cutting up to 75 mm (3") for demolition, scrapping and other heavy-duty cutting demands.
- Drag-cutting consumables make it easy to follow a line or template.
- Metal removal rate on mild steel up to 18.7 kg/hr (41.2 lbs/hr).
- Plasma gouging can replace grinding or carbon arc gouging for many metal-removal applications. Plasma gouging produces less noise and fumes than carbon arc gouging and avoids risks of metallurgic problems from carbon contamination.

For more information, visit:
www.hypertherm.com

Hypertherm, MAX, LongLife, CoolFlow, TrueFlow, HyPerformance and HPR are trademarks of Hypertherm, Inc. and may be registered in the United States and/or other countries. All other trademarks are the property of their respective owners.

Environmental stewardship is one of Hypertherm's core values, and it is critical to our success and our customers' success. We are striving to reduce the environmental impact of everything we do. For more information: www.hypertherm.com/environment.

© 8/2018 Hypertherm, Inc. Revision 3
870890



Operating data

Virtually dross-free cutting capacity – mild steel 20 mm (3/4")
Production pierce capacity – mild steel 32 mm (1-1/4")
Severance* – mild steel 75 mm (3")
Bevel – 200 amp consumables support 45° bevel capability

| Material | Current (amps) | Thickness (mm) | Approximate cutting speed (mm/min) | Thickness (inches) | Approximate cutting speed (ipm) |
|-----------------------|----------------|----------------|------------------------------------|--------------------|---------------------------------|
| Mild steel | | | | | |
| Air plasma | 50 | 1 | 8050 | 20 ga | 325 |
| Air shield | | 3 | 3760 | 0.135 | 110 |
| Air plasma | 130 | 6 | 3865 | 1/4 | 150 |
| Air shield | | 12 | 2045 | 1/2 | 75 |
| Air plasma | 200 | 6 | 4885 | 1/4 | 190 |
| Air shield | | 12 | 2794 | 1/2 | 110 |
| | | 20 | 1415 | 3/4 | 60 |
| | | 25 | 940 | 1 | 35 |
| | | 32 | 630 | 1-1/4 | 25 |
| | | 50 | 215 | 2 | 8 |
| O ₂ plasma | 50 | 1 | 6775 | 20 ga | 270 |
| Air shield | | 3 | 3650 | 0.135 | 130 |
| O ₂ plasma | 130 | 6 | 3925 | 1/4 | 150 |
| Air shield | | 12 | 2200 | 1/2 | 80 |
| O ₂ plasma | 200 | 6 | 6210 | 1/4 | 235 |
| Air shield | | 12 | 3415 | 1/2 | 130 |
| | | 20 | 1920 | 3/4 | 80 |
| | | 25 | 1430 | 1 | 55 |
| | | 32 | 805 | 1-1/4 | 32 |
| | | 50 | 270 | 2 | 10 |
| Stainless steel | | | | | |
| N ₂ plasma | 200 | 12 | 2260 | 1/2 | 80 |
| N ₂ shield | | 20 | 1190 | 3/4 | 50 |
| Air plasma | 200 | 12 | 3320 | 1/2 | 120 |
| Air shield | | 20 | 1440 | 3/4 | 60 |
| Aluminum | | | | | |
| N ₂ plasma | 200 | 12 | 3370 | 1/2 | 125 |
| N ₂ shield | | 20 | 1630 | 3/4 | 70 |
| Air plasma | 200 | 12 | 3370 | 1/2 | 125 |
| Air shield | | 20 | 1625 | 3/4 | 70 |

* The thickness that can be severed at approximately 125 mm/min (5 ipm) with reduced cut quality. Cutting at severance thickness should be infrequent.

Cut with confidence

- Hypertherm is ISO 9001: 2000 registered.
- Hypertherm's full-system warranty provides complete coverage for one year on the torch and leads and two years on all other system components.
- Hypertherm's plasma power supplies are engineered to deliver industry leading energy efficiency and productivity with power efficiency ratings of 90% or greater and power factors up to 0.98. Extreme energy efficiency, long consumable life, and lean manufacturing lead to the use of fewer natural resources and a reduced environmental impact.



Hypertherm[®]
SHAPING POSSIBILITY[®]

